



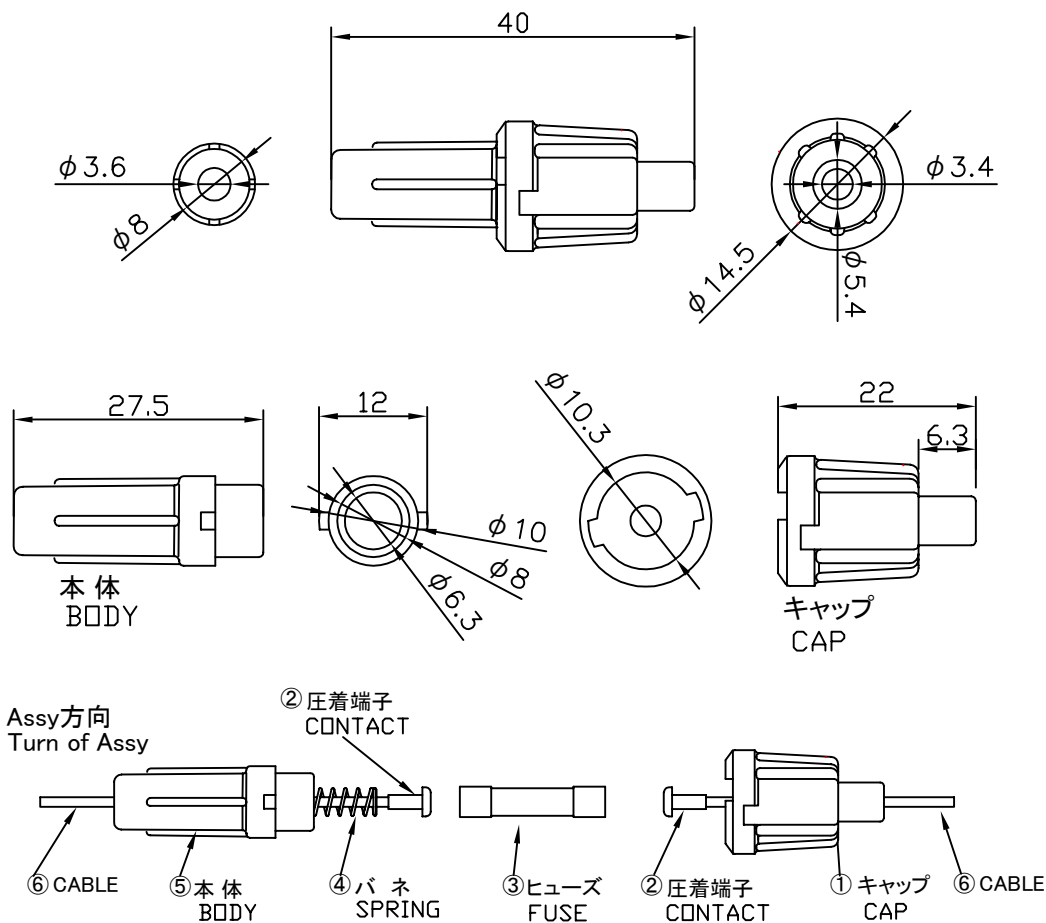

バネ
SPRING
FH-0017

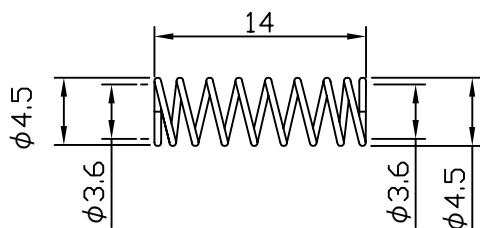


SPRING
DATA

Specified Load(取付加重) 600g/Compressed 7mm
Active Coils(有効巻き数) Active 7 Coils
Closed End(両端巻き数各1巻)
Wind Turn(巻方向): Right

CAUTION

本体側はたるませてください
ケーブルに張力を加えないで下さい

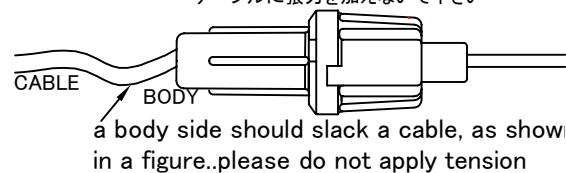

			RATING		5A 125V AC		
			FUSE TYPE		φ 5.2× 20mm		
⑥	CABLE	OPTION	TOLERANCE	SCALE	DATE	DRAW	APRO
⑤	BODY	Polyethylene	±0.3	1/1	25.03.10	E.T	E.T
④	SPRING	φ 0.45 SW-60C Ni Drawing FH-0017	NAME				
③	FUSE	OPTION φ 5.2× 20	INLINE FUSE HOLDER				
②	CONTACT	OPTION φ 4BUTTON CONTACT	P/No				
①	CAP	Polyethylene	FH-102				
PART NAME			Shintoku Kogyo Co., Ltd.				
	MATERIAL	FINISH	NOTE				