
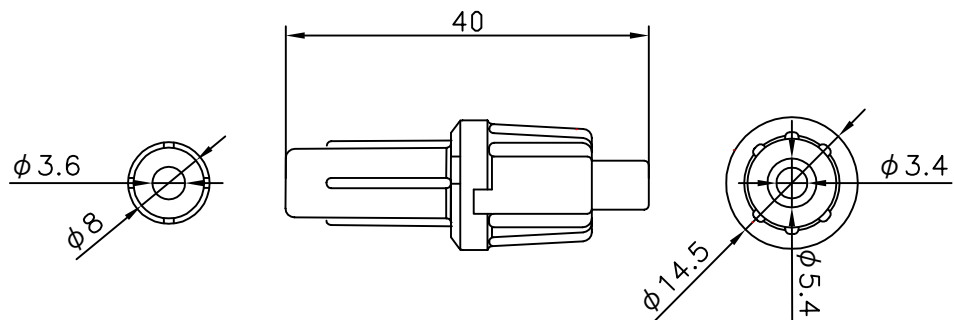


SPRING DATA

Specified Load(取付加重) 600g/Compressed 7mm
Active Coils(有効巻き数) Active 7 Coils
Closed End(両端巻数各1巻)
Wind Turn(巻方向): Right

CAUTION

本体側はたるませてください
ケーブルに張力を加えないで下さい

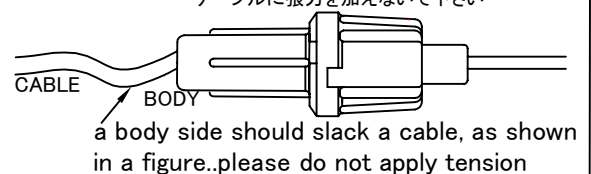

			FUSE TYPE		φ 5.2× 20mm		
⑥	CABLE	型番FH-108AMR図面に記載	TOLERANCE	SCALE	DATE	DRAW	APRO
⑤	BODY	Polyamide66 UL94-V0	±0.3	1/1	2025.03.13	E.T	E.T
④	SPRING	φ 0.45 SW-60C Ni Drawing FH-0017	NAME INLINE FUSE HOLDER				
③	FUSE	φ 5.2× 20 型番FH-108AMR図面に記載					
②	CONTACT	型番FH-108AMR図面に記載	P/No FH-108				
①	CAP	Polyamide66 UL94-V0					
	PART NAME	MATERIAL FINISH NOTE	Shintoku Kogyo Co.,Ltd.				